

COOLAG.

TILE BACKER CEMENT BOARD



WATER RESISTANT

Will not deteriorate when subjected to water or moisture



MOULD RESISTANT

Is resilient to mould growth



SOUND ABSORPTION

Excellent sound dampening




LIGHTWEIGHT AND EASY TO USE

Cement particle board makes handling easy



SCORE & SNAP CUTTING METHOD

No special tools required

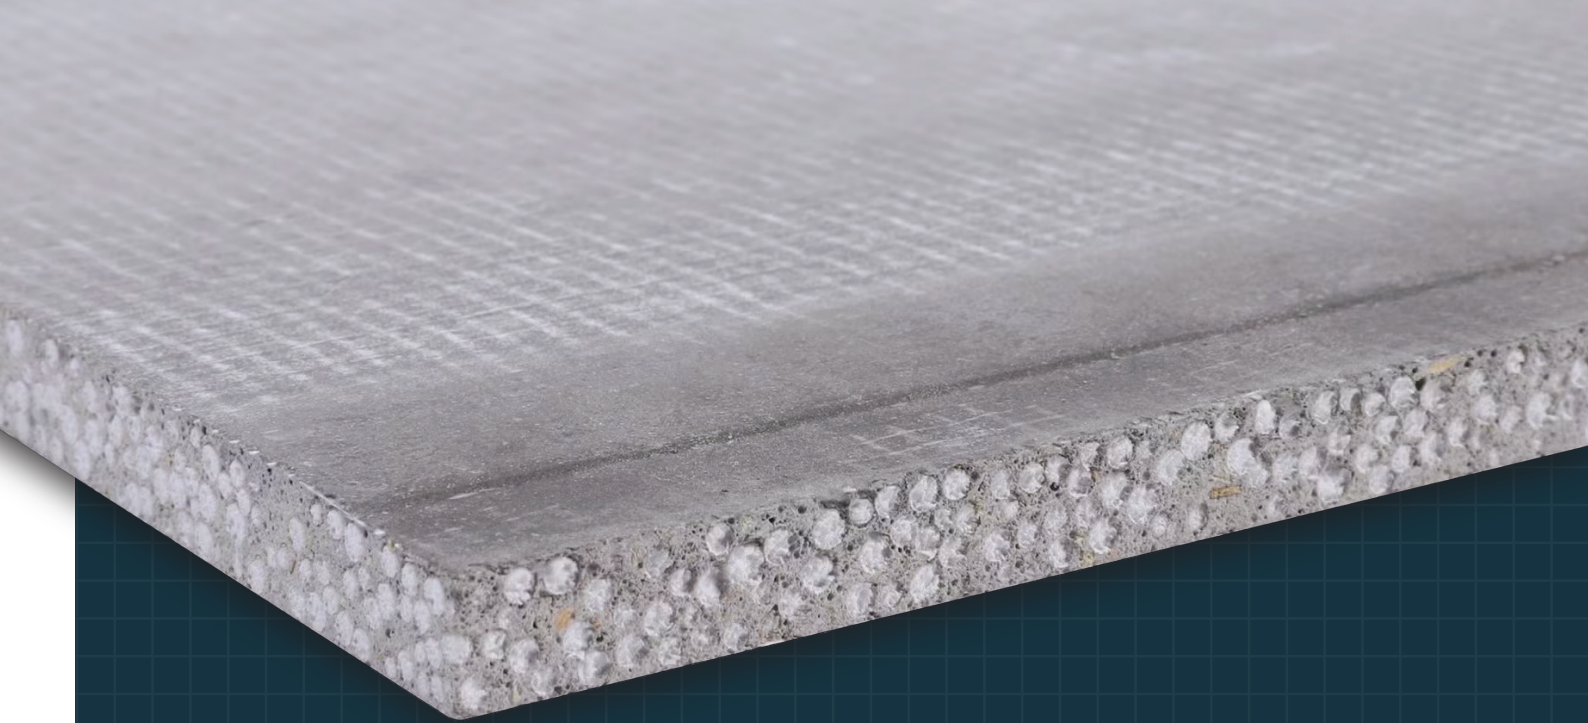

COOLAG.

TILE BACKER CEMENT BOARD

**COOLAG TILE BACKER
CEMENT BOARD IS THE
BEST POSSIBLE SURFACE
TO TILE ONTO, PERFECT
FOR BATHROOMS AND
WET ROOMS.**



Mould & rot
resistant



Water
resistant



Heat resistant



Lightweight



Easy to cut
& install



Stable layer
for tiling



Instructions for use



Key

- 1. Timber stud wall
- 2. Masonry wall
- 3. Timber floor
- 4. Concrete floor
- 5. Coolag tile backer
- 6. Tile adhesive
- 7. Wall tiles
- 8. Floor tiles



Floors

6mm should be used over existing timber floors and should be screwed at 250mm centres (more if there is movement in the substrate).

Tile backer should be fixed with the rough face upwards. It does not require primer a good quality tile adhesive should be applied by notched trowel the thicker the tile the deeper the notch is required.

Tiles should be placed whilst the adhesive is still wet so don't overspread as placing tiles late can cause failures.

Where there is no timber floor and you are planning to fix tile backer to the joists are at 400mm centres 12mm can be screwed directly, ensure that board joints are supported by the joist as you cannot join in mid air between joists. Screws should be 45mm minimum length at 150 mm centres and tile backer place with the rough side towards you.

Walls

Wall tiling should always be carried out on 12mm on wall situations as often there is considerable weight to be considered.

The 12mm tile backer should be fitted rough side toward you and does not require a primer.

The board should be fixed directly to the studs @400mm centres with minimum 45mm screws at 150mm centres.

Tile backer handling

Tile backer is easy to work with and can be scored and snapped for ease of use. Tile backer can also be cut by saw and normal dust mask precautions should be taken.

Frequently asked questions

Can I fix through Coolag tile backer?

Yes, all fixings should be made directly into studs or noggins fixed firmly between the studs.

Which side should be tiled on?


Coolag tile backer should be fixed with the rough side facing the inside of the room.


Can I use Coolag tile backer in conjunction with underfloor heating?

Yes, it is suitable for under floor heating. Boards should always be placed below the heating element.

Can I fix through Coolag tile backer?

Use galvanised, self drilling, self counter-sinking screws. For 6mm use 25mm screws, and 38mm screws on 12mm Coolag tile backer.

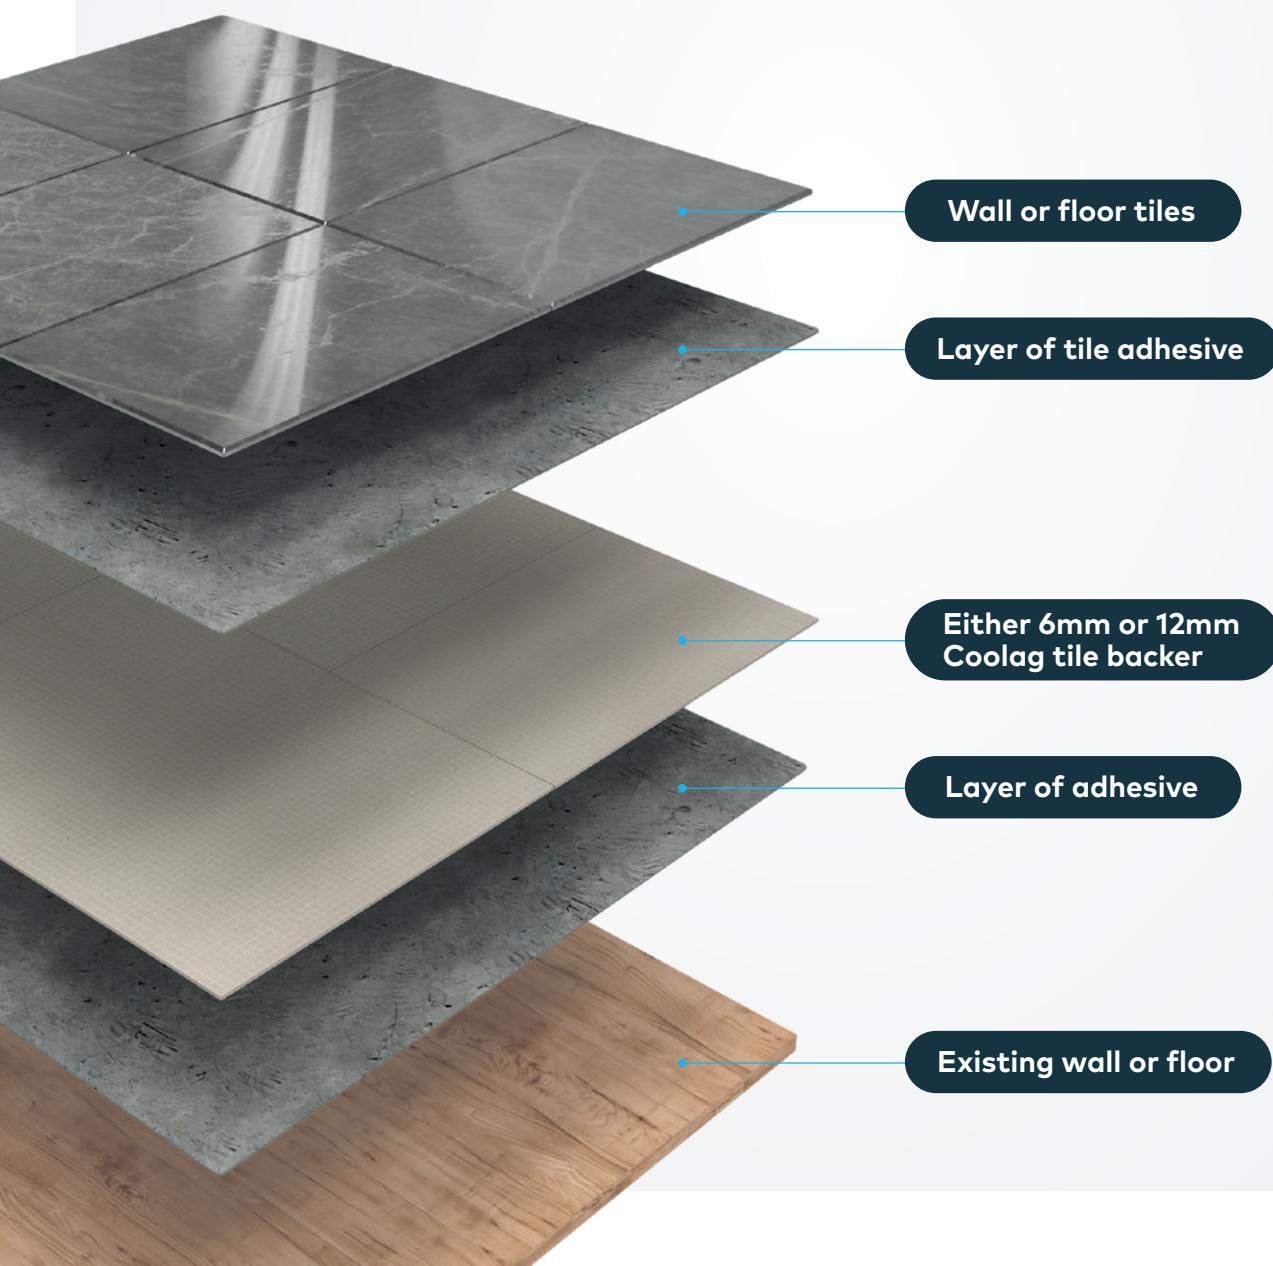

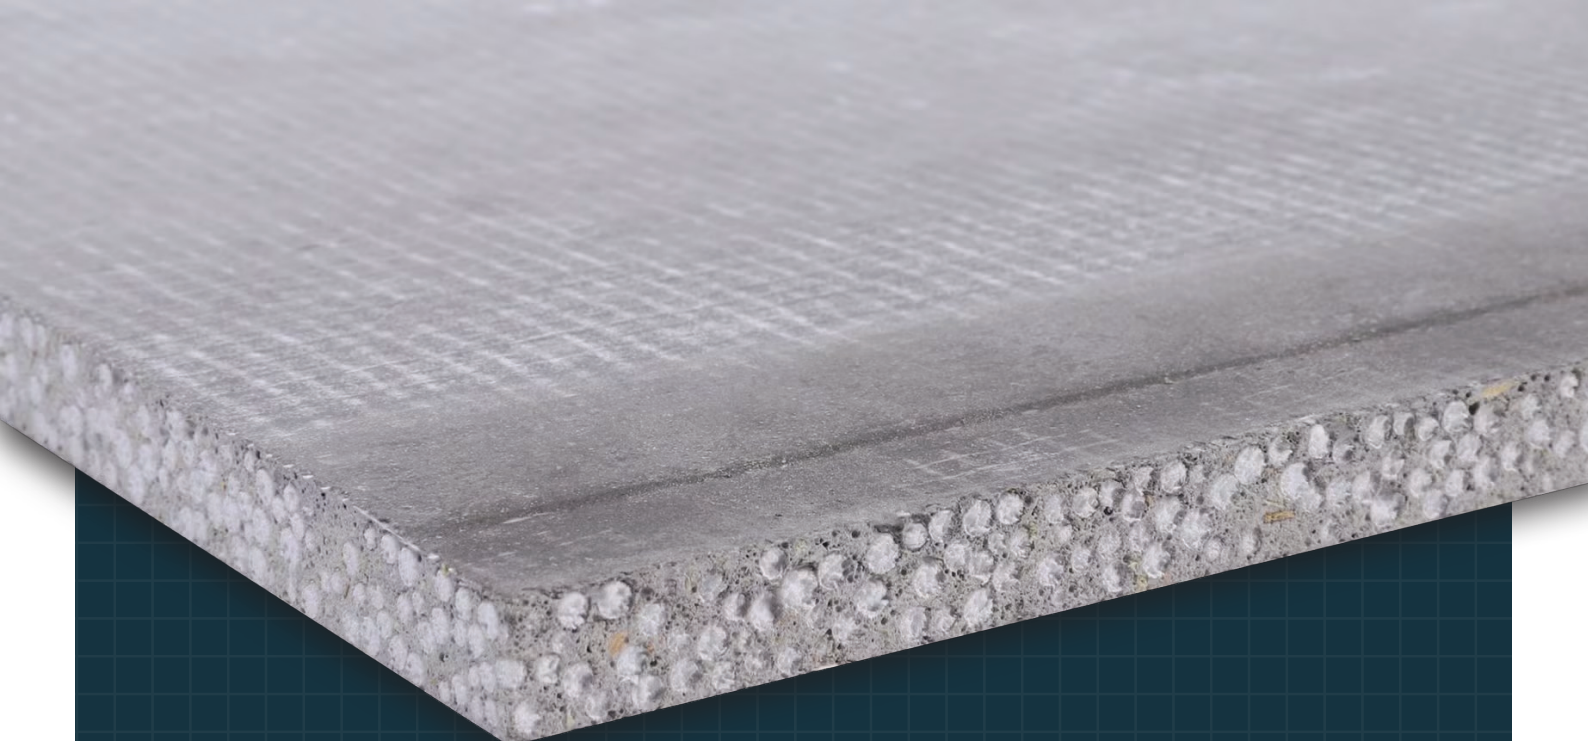

COOLAG.


TILE BACKER CEMENT BOARD

Industry websites

Tile Association	www.tiles.org.uk
Ceramic Tiling	www.cta-tiling.co.uk
Ardex adhesives	www.ardex.co.uk
Bal Adhesives	www.bal-adhesives.com
Homelux Trims	www.homelux.co.uk
Mapei	www.mapei.com

COOLAG.

TILE BACKER CEMENT BOARD

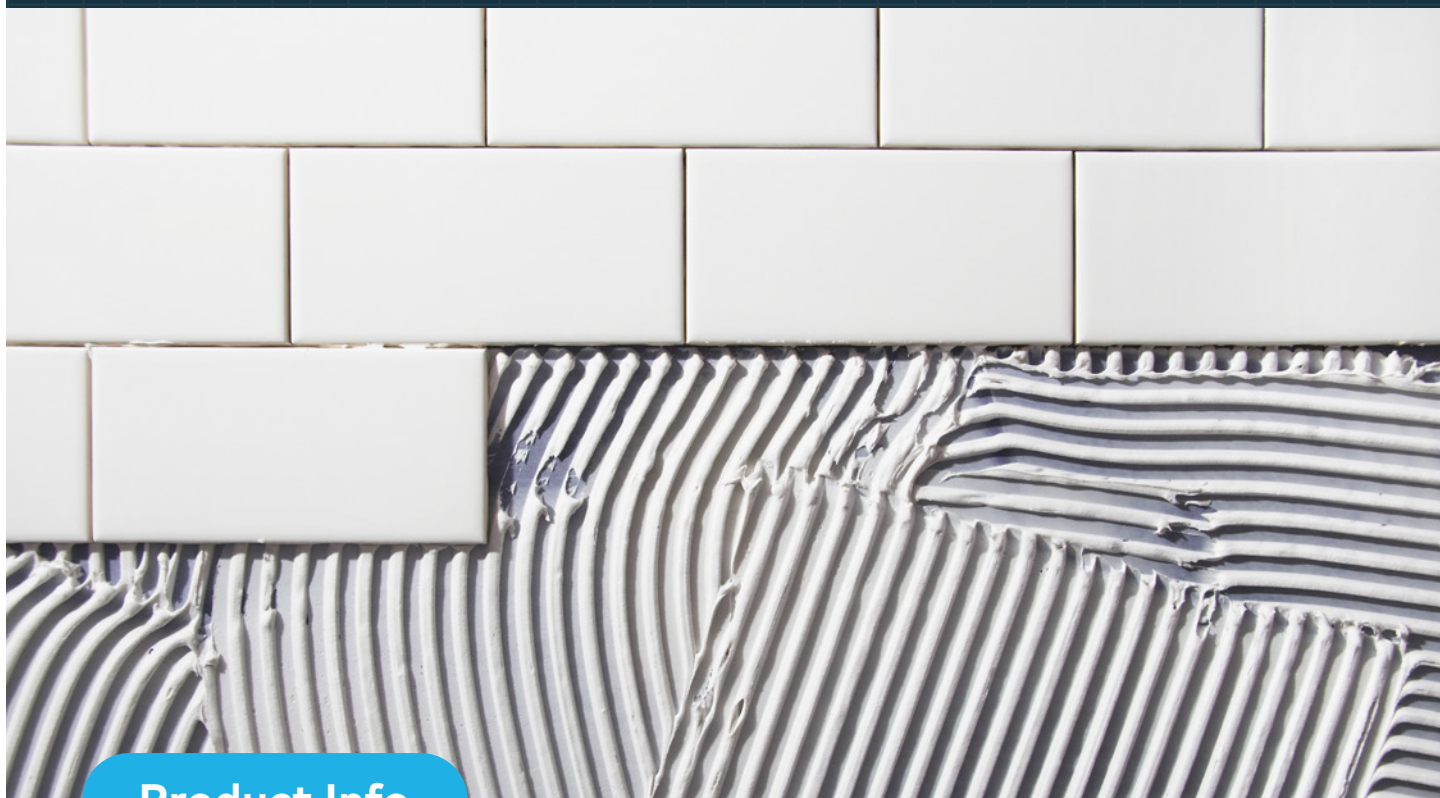

Product Info

Thickness	Size (mm)	Pallet sizes	Weight (kg)
6mm	1200 x 800	100	4
12mm	1200 x 800	100	8

IPP Ltd. Bradwell Hall,
Bradwell on Sea, Essex
CMO 7HX

Telephone
01621 776252

Email
sales@intpetro.com

If you have any technical difficulties, please give us a call
on 01621 776252. We would be happy to help you out!

building products
ipp